

# SS PROCESS GAUGE MODEL '4501-SC'



## STANDARD SPECIFICATIONS:

**DIAL:** 4 1/2" Diameter

**CASE:** Stainless Steel

Solid Front/Blow-Out Back

**LENS:** Plastic With Gasket

**POINTER:** Micro-Adjustable

**BOURDON TUBE:** AISI 316 Stainless Steel

**SOCKET :** AISI 316 Stainless Steel

**MOVEMENT:** 304 SS Heavy Duty Bushed

**ACCURACY:** 0.5 % Full Scale(ANSI Grade 2A)

## STANDARD FEATURES


\*Overload And Underload Stops

\*Hermetically Sealed/Weather Proof

\*Welded Case and Connection

\*Liquid Fillable / No Kit Required

*\*Best Product Best Price Best Value !!*

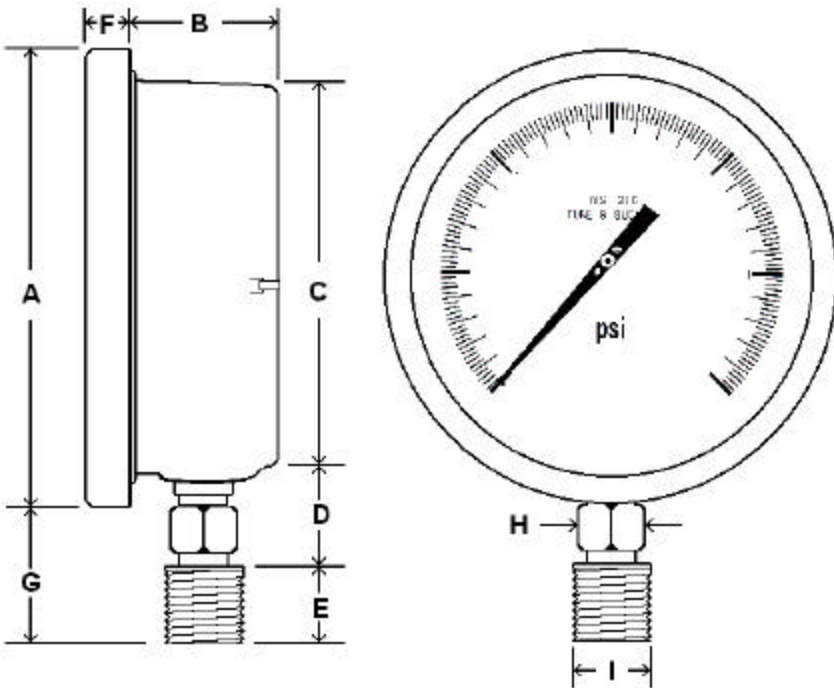

	A	B	C	D	E	F	G	H	I(=NPT)
INCH	5.42	1.62	4.75"	1.10"	.81"	.61"	1.50"	.75"	1/2" or
MM	138	41	120	28	20	15.5	38	19	1/4"

RANGE	FIGURES	MINOR
30"-0 hg vac	5"	0.2"
30"-0-15	10" & 5 psi	1" & 0.5 psi
30"-0-30	10" & 5 psi	1" & 0.5 psi
30"-0-60	10" & 10 psi	2" & 1 psi
30"-0-100	10" & 20 psi	2" & 1 psi
30"-0-150	10" & 30 psi	5" & 2 psi
30"-0-200	10" & 50 psi	5" & 2 psi
30"-0-300	10" & 50 psi	10" & 5 psi
30"-0-600	10" & 100 psi	10" & 10 psi
0-15 psi	3 psi	0.2 psi
0-30 psi	5 psi	0.2 psi
0-60 psi	5 psi	0.5 psi
0-100 psi	10 psi	1 psi
0-160 psi	20 psi	1 psi
0-200 psi	20 psi	2 psi
0-300 psi	50 psi	2 psi
0-400 psi	50 psi	2 psi
0-600 psi	50 psi	5 psi
0-800 psi	100 psi	5 psi
0-1000 psi	100 psi	10 psi
0-1500 psi	250 psi	10 psi
0-2000 psi	200 psi	20 psi
0-3000 psi	500 psi	20 psi
0-5000 psi	1,000 psi	50 psi
0-10,000 psi	1,000 psi	100 psi
0-15,000 psi	2,500 psi	100 psi
0-20,000 psi	2,000 psi	200 psi