


BIMETAL THERMOMETER

TYPE 'BxSx' STRAIGHT FORM

STANDARD FEATURES


- All Stainless Construction
- With Glass Lens
- Anti-Parallax Dial
- Vibration Resistant (No Needle Flutter)
- Fast Response To Temperature Change
- Crimped Or Removeable Bezel Available
- +/- 1 % Full Scale Accuracy

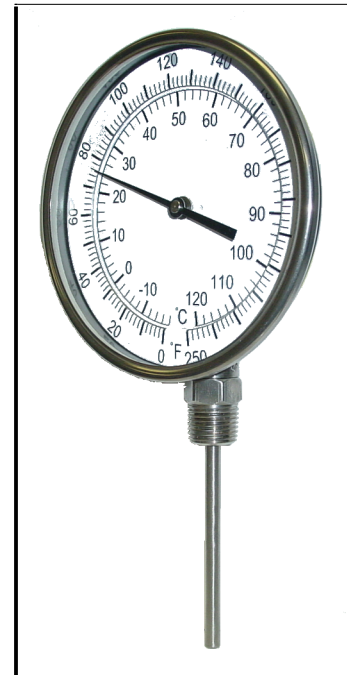

| STEM LENGTH* | PART NUMBER | |
|--------------|-------------|---------|
| | 3" DIAL | 5" DIAL |
| 2 1/2" | B3S2 | B5S2 |
| 4" | B3S4 | B5S4 |
| 6" | B3S6 | B5S6 |
| 9" | B3S9 | B5S9 |
| 12" | B3S12 | B5S12 |
| 15" | B3S15 | B5S15 |
| 18" | B3S18 | B5S18 |
| 24" | B3S24 | B5S24 |

| STANDARD RANGES* | |
|------------------|----------------|
| CODE | RANGE |
| AA | -40/120 F & C |
| BB | -40/160 F & C |
| EE | 0/150 F & C |
| GG | 0/200 F & C |
| JJ | 20/240 F & C |
| II | 0/250 F & C |
| MM | 50/300 F & C |
| PP | 50/400 F & C |
| RR | 50/550 F & C |
| SS | 150/750 F & C |
| TT | 200/1000 F & C |

*NOTE: OTHER RANGES, STEM LENGTHS AND CONFIGURATIONS ARE AVAILABLE UPON REQUEST. PLEASE CALL WITH ANY INQUIRIES.

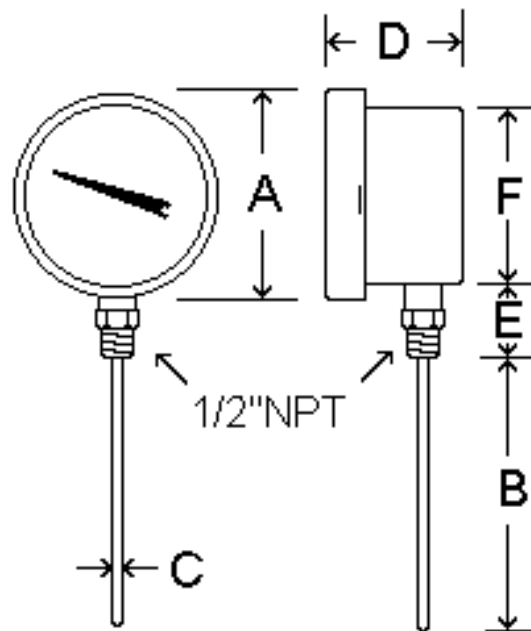

| | INCHES | MM |
|---|-------------|--------|
| A | 3.32" | 84.32 |
| B | STEM LENGTH | LENGTH |
| C | .25" | 6.45 |
| D | 1.76" | 44.91 |
| E | 1.36" | 34.63 |
| F | 2.96" | 75.3 |